


Technical Rider Popzaal

Versie 1.10

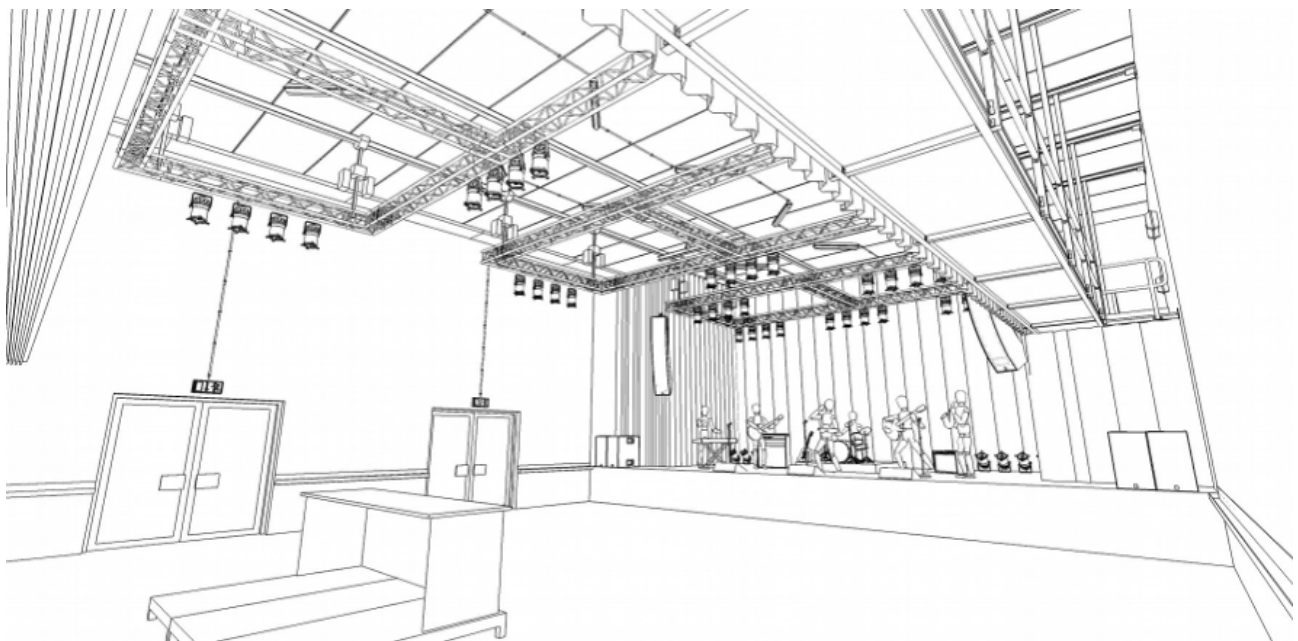

ECI cultuurfabriek

Address: ECI 13
6041 MA
Roermond

Phone: 0475-31 71 71

E-mail : productie@ecicultuur.nl

Website : www.ecicultuurfabriek.nl

Table of contents:

General Information:

- Popzaal dimensions 3
- Accessibility 3
- Dressing rooms 3
- Load in/ out 3
- Internet / wifi 3
- Parking 4

Popzaal audio:

- Main PA 5
- Monitors 5
- Mixers 5
- Microphones 5
- Microphone stands 5
- DI's 5
- Wireless 6
- Connectivity 6

Popzaal lighting:

- Console 7
- Infra 7
- Front Lights 7
- Parcans (LED) 7
- Moving lights 7
- Smoke/haze 7

Popzaal power 7

Popzaal floor plan 8-9-10

Popzaal lighting plot 11

Popzaal Lighting personalities 12-13

Popzaal lighting patchlist 14-15-16-17

Popzaal General information:

Dimensions:

Dimensions venue including stage: 18,30m long and 12,90m wide.

Dimensions venue without stage: 12,30m long and 12,90m deep

Floor surface for audience: 155m².

Stage Dimensions without backdrops etc. 12,90m x 6,00m.

Stage Dimensions With Backdrops etc. 8,60m x 5,20m.

Stage height: 1.1m.

Stage clearance: variable (max. 5,5m)

Accessibility:

The popzaal has two double access doors for the audience and one single door to access the stage.

There also are toilets accessible from within the popzaal.

Dressing rooms

Our dressing rooms are on the second floor!

2 dressing rooms are available.

There are max. 4 dressing rooms available. If the schedule allows.

All dressing rooms are provided with a toilet and a shower.

All dressing rooms are equipped with 3 make-up places.

All dressing rooms have WiFi

In the hall is one ASL intercom available

Load in/ out

The loading and unloading area is approximately 30 meters from the stage, where both vans and trailers can unload.

Because we have to share the loading dock with the theater, vehicles may have to be moved for other companies

Material can be supplied via one of the public entrances, which can then be rolled onto the stage via a separate ramp or stacker (not present!).

Internet/ Wifi

LAN:

Fixed LAN connection for DJ with streaming capabilities to the internet.

Wifi:

We have a separate WiFi network for artists.

Popzaal Audio:

Main PA:

2x L'acoustic A15 Focus per side
1x L'acoustic A15 Wide per side
4x L'acoustic KS21
3x L'acoustic LA4X Digital Amplifier
1x Lab gruppen lake LMX48

Monitors:

5x Sound Projects X-tender
7x Sound Projects X-Act
1x Sound Project sp15 MK2

Mixer(s)

Allen&Heath Avantis incl. D-Pack (Main)
Allen&Heath Avantis incl. D-Pack (monitor)
2x Avantis Rack GX4816
1x Klotz Split

Microphones (shared with theater)

7x Shure SM58
7x Shure SM57
7x Shure Beta 57a
2x Shure Beta 87a (Condenser)
1x Shure Beta 91a (Condenser)
2x Milab VM-44 (Condenser)
2x Neumann KM184 (Condenser)
2x Sennheiser Shotgun (condenser)
1x Audix Set (D6-D4-D2-i5)
2x SE Electronics SE1A (Condenser)
1x Sennheiser 604
2x Sennheiser MZH 504
1x Sennheiser D-421
4x Clip-on mic

Microphone stands (shared with theater):

12x K&M Long mic stands
8x K&M short mic stands
6x K&M speaker stand

DI's (shared with theater):

6x Radial J45 MK2
1x Radial Pro 48
1x Berlinger Ultra DI
6x BSS AR-133
2x Proel DB2A Stereo DI

Wireless (shared with theater):

Sennheiser EW100 series, handheld with 845 head

Headset DSP4

DPA miniature mic 4066F (do not fit on the EW100 beltpack).

1x T.Bone Theaterfunkrack 8 channel receiver

8x T.Bone free solo PT 660Mhz

4x T.bone free handheld 660Mhz

8x T.bone hesadmike -O AKG

4x.T.bone free solo paddle

Connectivity:

6x S-FTP Cat6E FOH -> Stage

2x Dmx FOH -> Stage

1x 230v (audio)

1x 230v (Lights)

Popzaal lighting:

Console:

GrandMa3 Compact XT

Infra:

1x elation 8 node

3x dmx booster

Frontlight:

4x ETC Sourcefour LED LUSTR+ 15-30 degr

Parcans (LED):

40x Elation EPAR QA

Moving Lights:

12x ADJ Focus Flex 50Ch

10x ADJ Focus Profile (With framing) 51CH

Smoke / Haze:


Adj entour venue


We don't have any dimmers!!


Popzaal power:


Various Shuko connections on stage

1x 63A CEE 5p 400V Stage Right

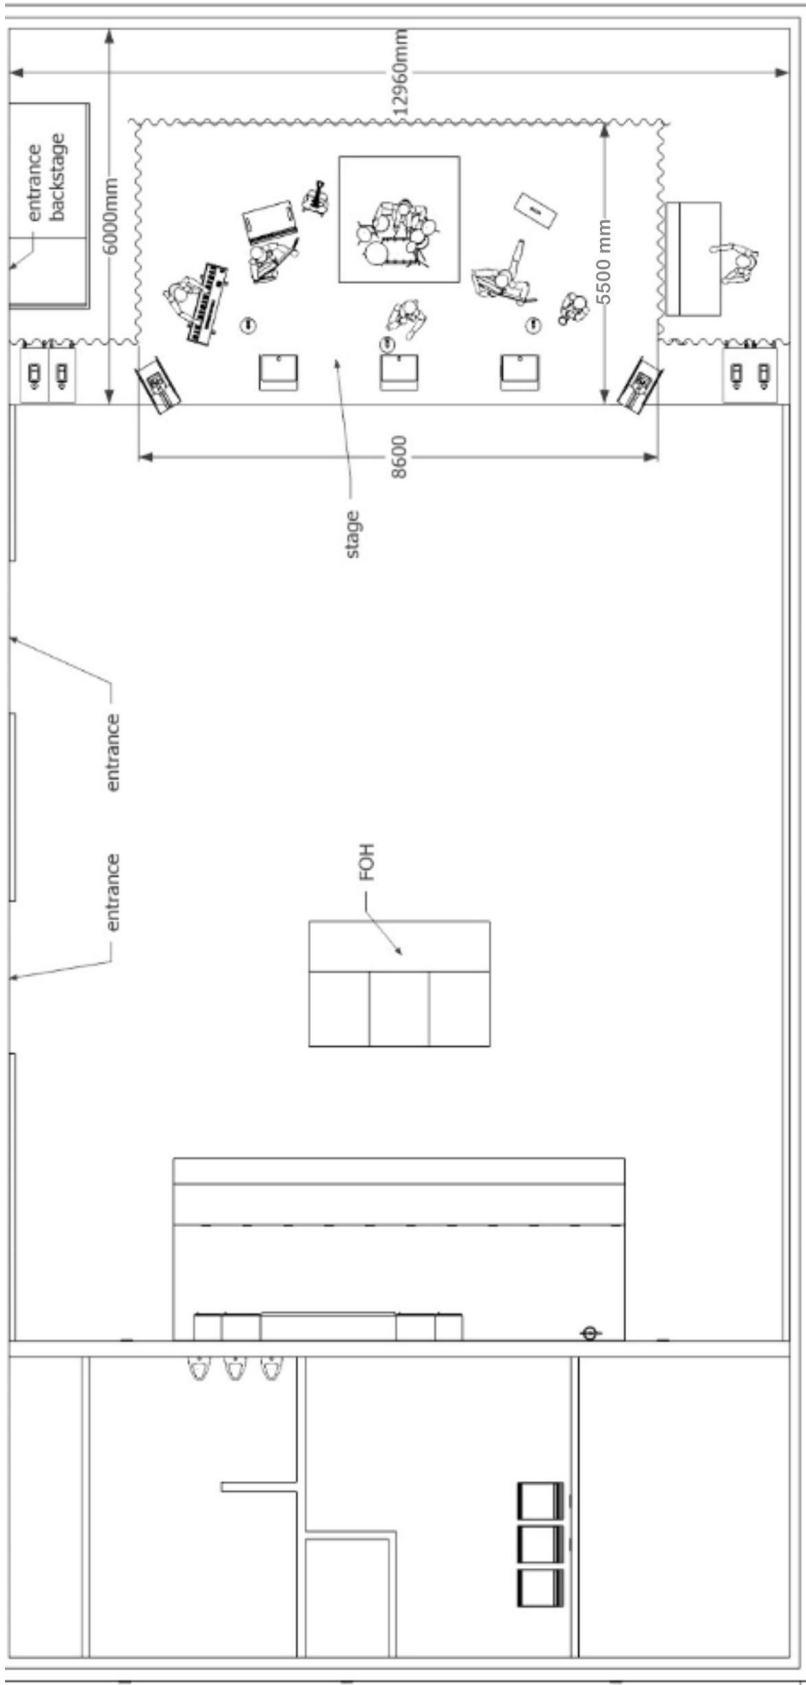

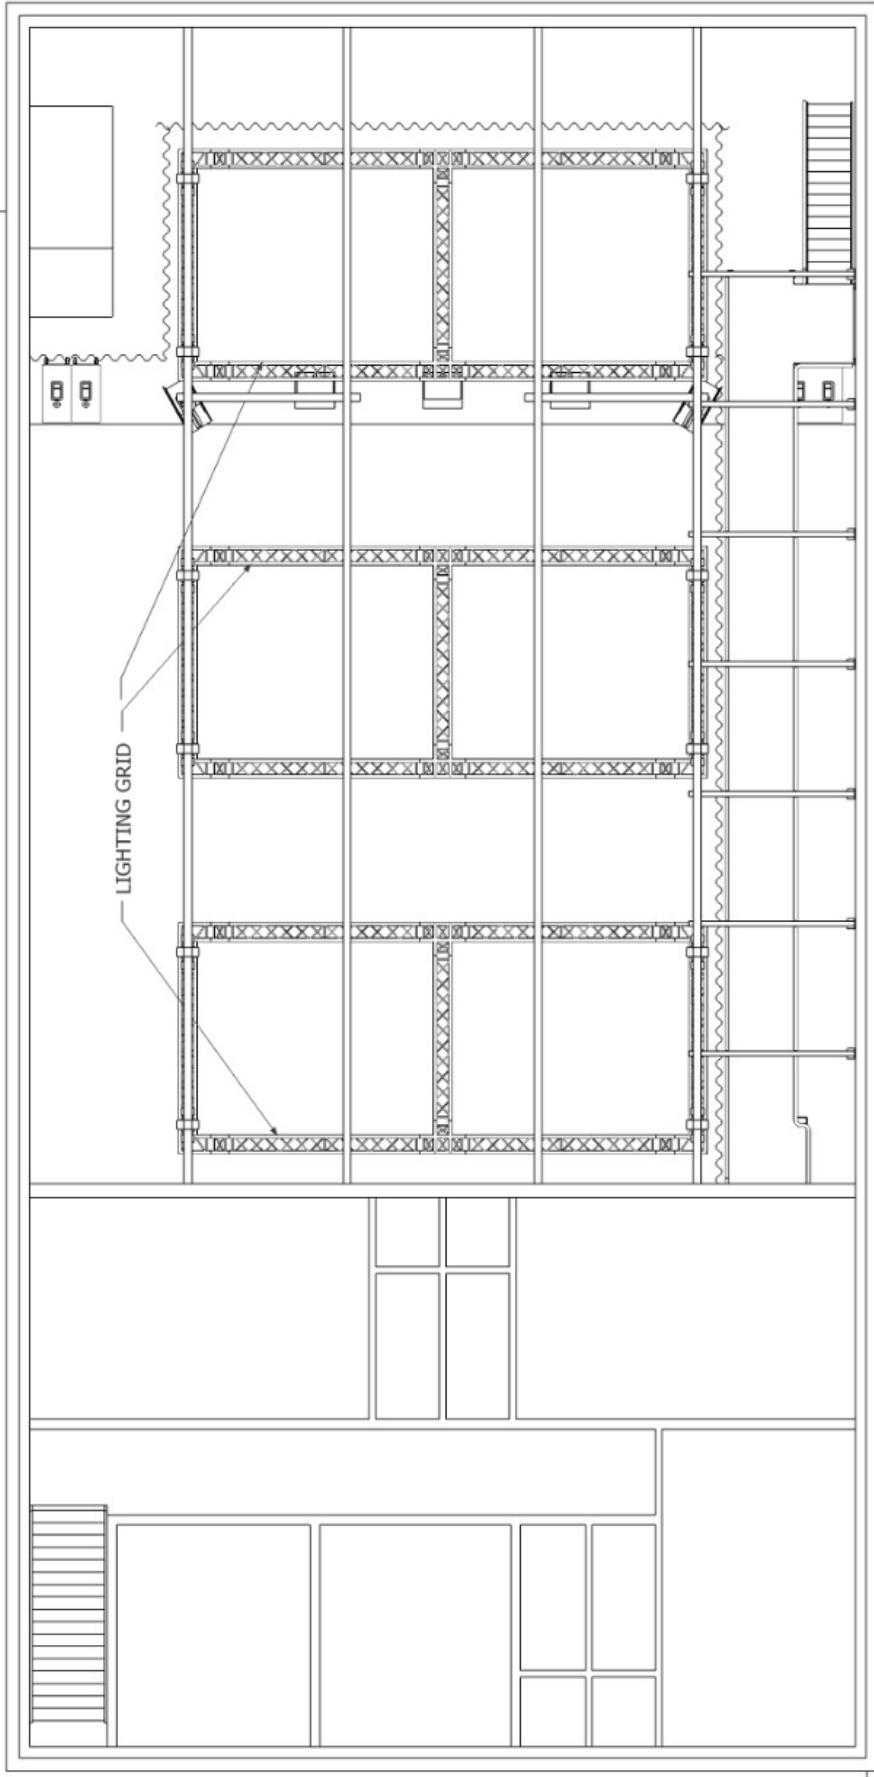

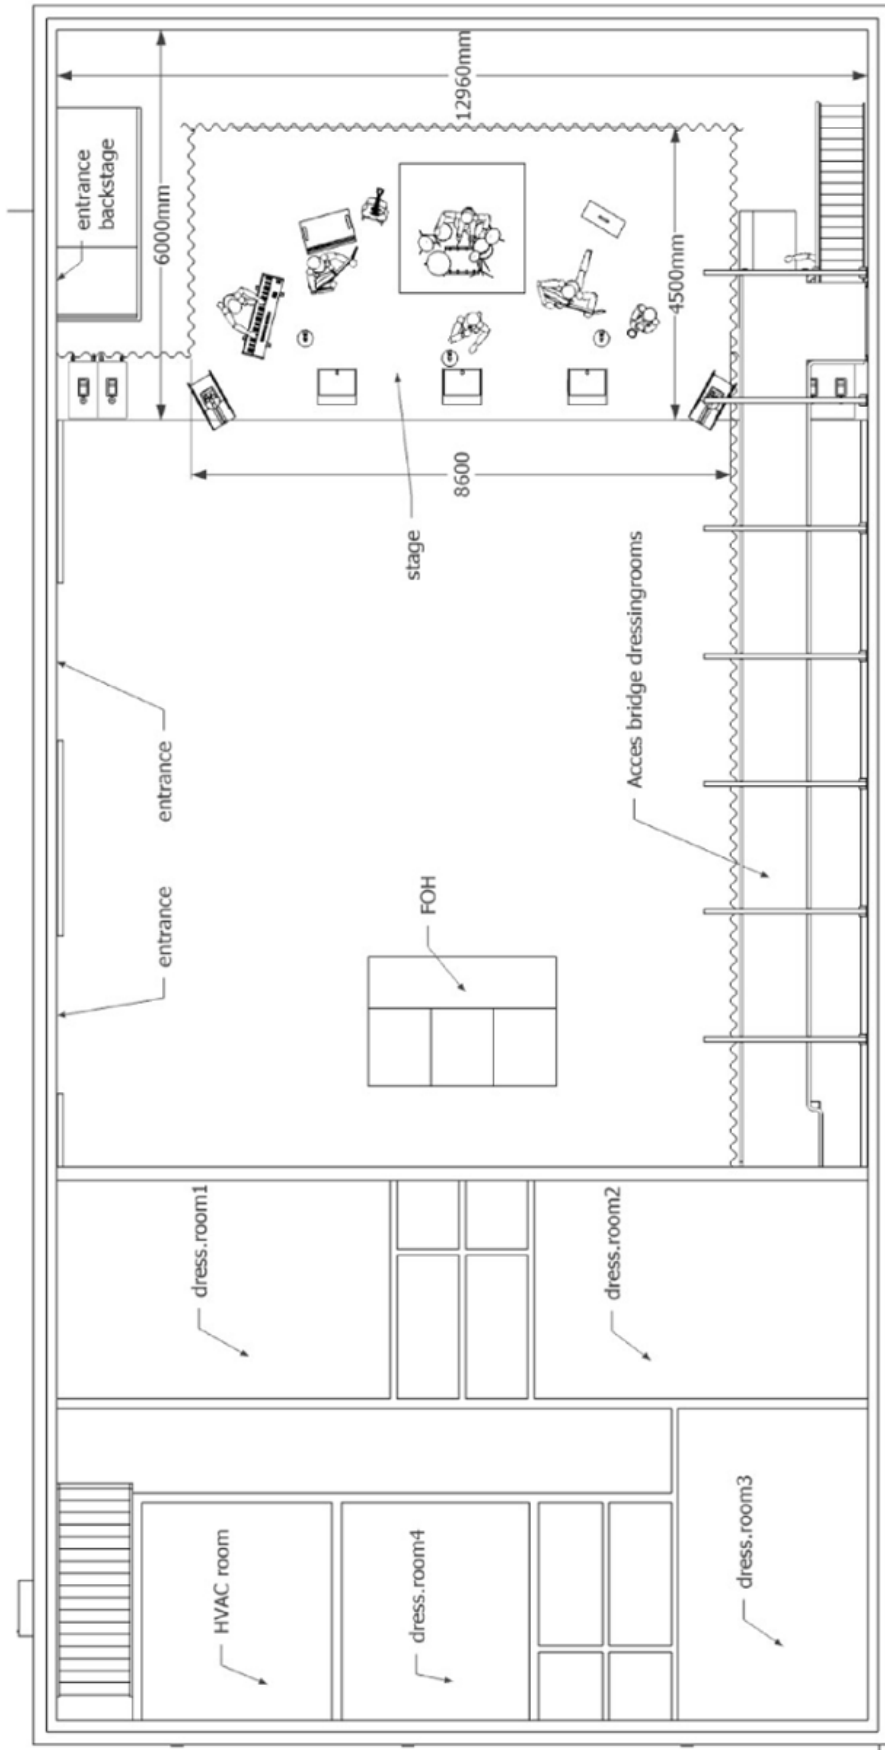

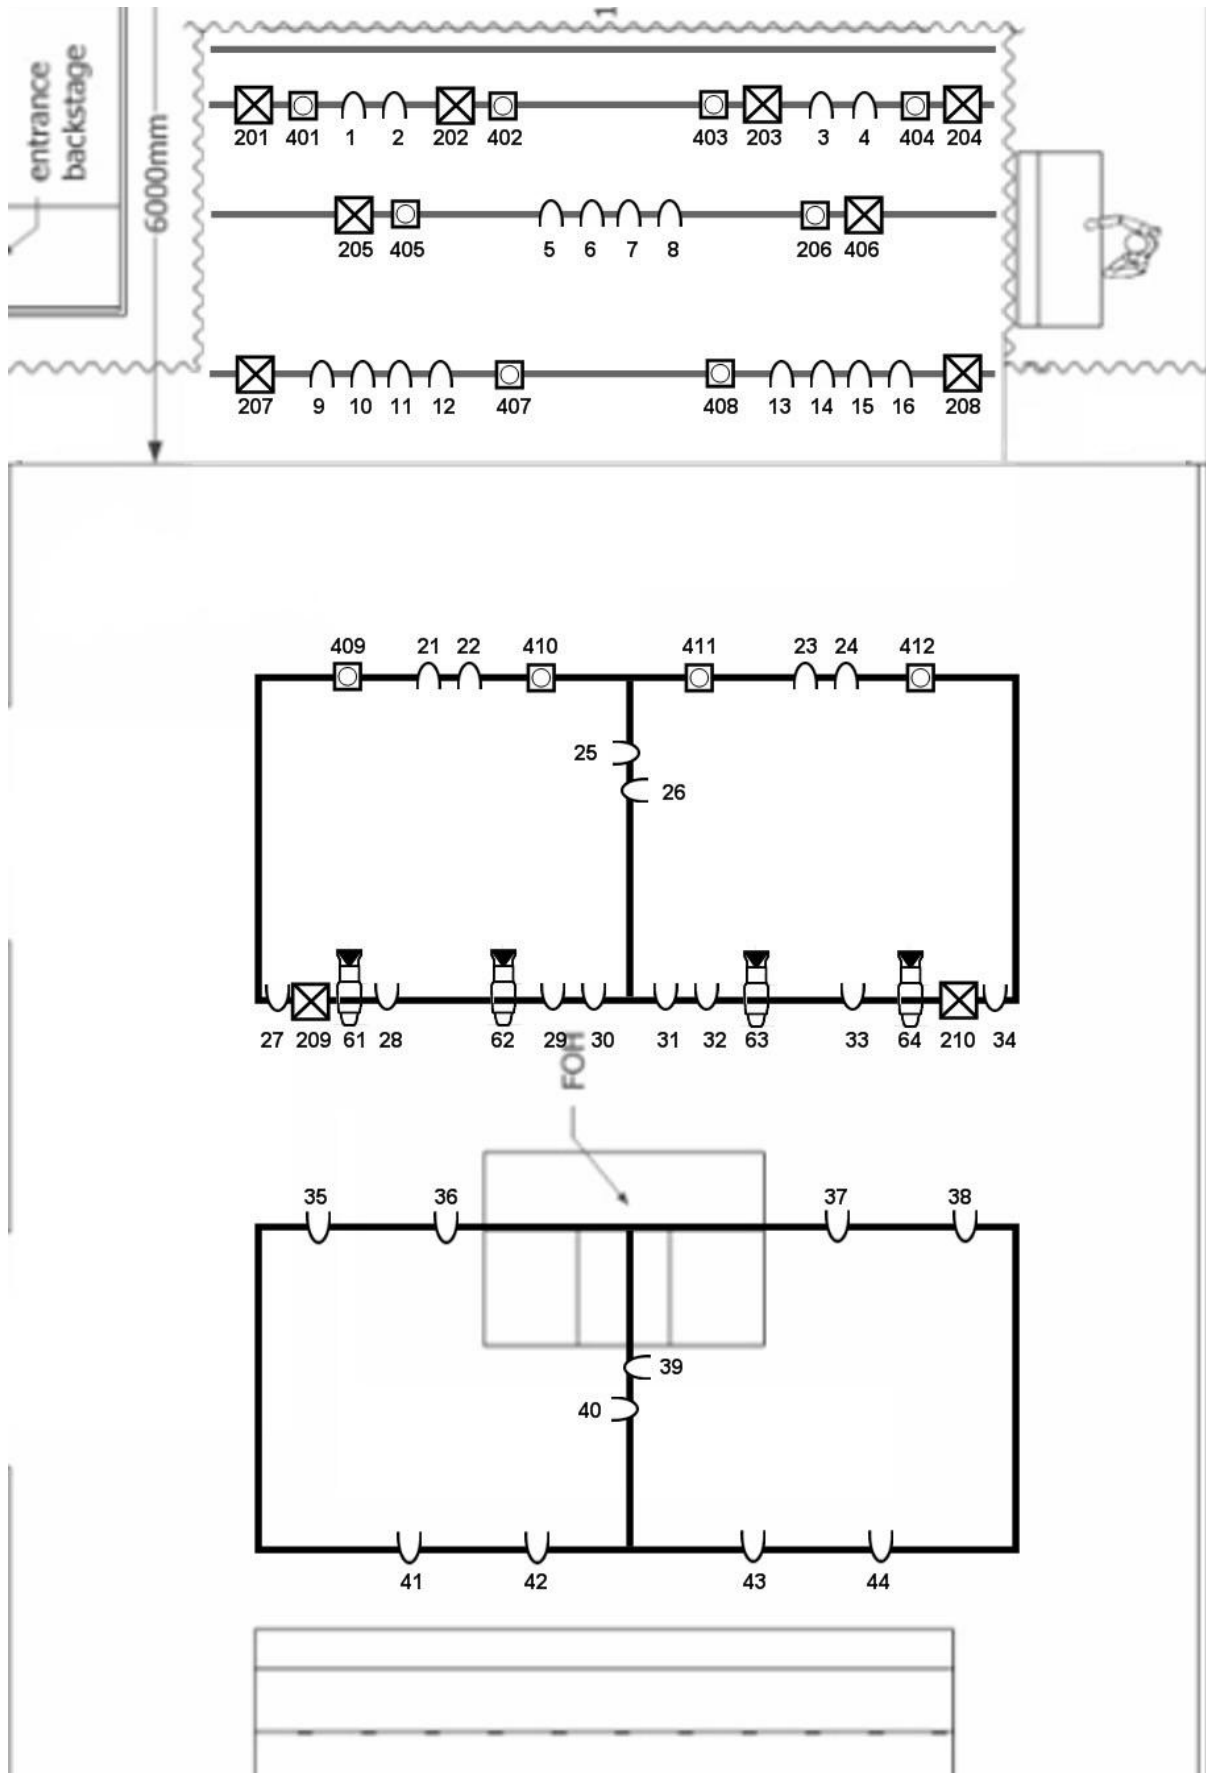

Popzaal Fixture Personality:

	ADJ Focus Profile	ADJ Focus Flex	Elation EPAR QA 7ch
Ch1	Pan	Pan	Red
Ch2	Pan Fine	Pan Fine	Green
Ch3	Tilt	Tilt	Blue
Ch4	Tilt fine	Tilt Fine	Amber
Ch5	Cyan	Red	Color Macro
Ch6	Cyan Fine	Green	Shutter/Strobe
Ch7	Magenta	Blue	Intensity
Ch8	Magenta Fine	White	
Ch9	Yellow	Red	
Ch10	Yellow Fine	Green	
Ch11	CTO	Blue	
Ch12	CTO Fine	White	
Ch13	White Color Presets	Red	
Ch14	Color Wheel	Green	
Ch15	Gobo_1	Blue	
Ch16	Gobo_1 Rotation	White	
Ch17	Gobo_1 Rotation Fine	Red	
Ch18	Gobo_2	Green	
Ch19	Shutter/Strobe	Blue	
Ch20	Dimmer	White	
Ch21	Dimme Fine	Red	
Ch22	Prism 3FC	Green	
Ch23	Prism Rotation	Blue	
Ch24	Prism Index Fine	White	
Ch25	Prism 4FC	Red	
Ch26	Prism Rotation	Green	
Ch27	Prism Index Fine	Blue	
Ch28	Focus	White	
Ch29	Focus Fine	Red	
Ch30	Zoom	Green	
Ch31	Zoom Fine	Blue	

Ch32	Iris	White	
Ch33	Iris Fine	Color Temperature	
Ch34	Frost	Color Temperature Presets	
Ch35	Animation Index + rotation	Color Wheel Foreground	
Ch36	Blade 1A	Color Wheel Background	
Ch37	Blade 1B	Color Temp RD-GR	
Ch38	Blade 2A	Color Macro's	
Ch39	Blade 2B	Shutter/Strobe	
Ch40	Blade 3A	Dimmer	
Ch41	Blade 3B	Dimmer Fine	
Ch42	Blade 4A	Zoom	
Ch43	Blade 4B	Zoom Fine	
Ch44	Frame Rotation	Dim Mode	
Ch45	Frame Rotation Fine	Dim Curve	
Ch46	Frame Speed	Internal Programs	
Ch47	Frame Macro's	Program Speed	
Ch48	Dim Mode	Program Fade	
Ch49	Dim Curve	Pan/Tilt Speed	
Ch50	Pan/Tilt Speed	Special Functions	
Ch51	Special Functions		

Popzaal lighting patchlist:

Fixture ID	Fixture Type	Fixture Name	Dmx Channel	Placement
1	Led Par	Elation EPAR QA 7CH	2.004	Stage 1
2	Led Par	Elation EPAR QA 7CH	2.011	Stage 1
3	Led Par	Elation EPAR QA 7CH	2.018	Stage 1
4	Led Par	Elation EPAR QA 7CH	2.025	Stage 1
5	Led Par	Elation EPAR QA 7CH	2.032	Stage 1
6	Led Par	Elation EPAR QA 7CH	2.039	Stage 1
7	Led Par	Elation EPAR QA 7CH	2.046	Stage 1
8	Led Par	Elation EPAR QA 7CH	2.053	Stage 1
9	Led Par	Elation EPAR QA 7CH	2.060	Stage 1
10	Led Par	Elation EPAR QA 7CH	2.067	Stage 1
11	Led Par	Elation EPAR QA 7CH	2.074	Stage 1
12	Led Par	Elation EPAR QA 7CH	2.081	Stage 1
13	Led Par	Elation EPAR QA 7CH	2.088	Stage 2
14	Led Par	Elation EPAR QA 7CH	2.095	Stage 2
15	Led Par	Elation EPAR QA 7CH	2.102	Stage 2
16	Led Par	Elation EPAR QA 7CH	2.109	Stage 2
17	Led Par	Elation EPAR QA 7CH	2.115	Stage 3
18	Led Par	Elation EPAR QA 7CH	2.123	Stage 3
19	Led Par	Elation EPAR QA 7CH	2.130	Stage 3
20	Led Par	Elation EPAR QA 7CH	2.137	Stage 3
21	Led Par	Elation EPAR QA 7CH	2.144	Stage 3
22	Led Par	Elation EPAR QA 7CH	2.151	Stage 3
23	Led Par	Elation EPAR QA 7CH	2.158	Stage 3
24	Led Par	Elation EPAR QA 7CH	2.165	Stage 3
25	Led Par	Elation EPAR QA 7CH	2.172	House 1

26	Led Par	Elation EPAR QA 7CH	2.179	House 1
27	Led Par	Elation EPAR QA 7CH	2.186	House 1
28	Led Par	Elation EPAR QA 7CH	2.193	House 1
29	Led Par	Elation EPAR QA 7CH	2.200	House 1
30	Led Par	Elation EPAR QA 7CH	2.207	House 1
31	Led Par	Elation EPAR QA 7CH	2.214	House 1
32	Led Par	Elation EPAR QA 7CH	2.221	House 1
33	Led Par	Elation EPAR QA 7CH	2.228	House 1
34	Led Par	Elation EPAR QA 7CH	2.235	House 1
35	Led Par	Elation EPAR QA 7CH	2.242	House 1
36	Led Par	Elation EPAR QA 7CH	2.249	House 1
37	Led Par	Elation EPAR QA 7CH	2.256	House 1
38	Led Par	Elation EPAR QA 7CH	2.263	House 1

39	Led Par	Elation EPAR QA 7CH	2.270	House 2
40	Led Par	Elation EPAR QA 7CH	2.277	House 2
41	Led Par	Elation EPAR QA 7CH	2.284	House 2
42	Led Par	Elation EPAR QA 7CH	2.291	House 2
43	Led Par	Elation EPAR QA 7CH	2.298	House 2
44	Led Par	Elation EPAR QA 7CH	2.305	House 2
45	Led Par	Elation EPAR QA 7CH	2.312	House 2
46	Led Par	Elation EPAR QA 7CH	2.319	House 2
47	Led Par	Elation EPAR QA 7CH	2.326	House 2
48	Led Par	Elation EPAR QA 7CH	2.333	House 2

201	Moving Head Spot	ADJ Focus Profile Extended 51ch	1.001	Stage 1
202	Moving Head Spot	ADJ Focus Profile Extended 51ch	1.052	Stage 1
203	Moving Head Spot	ADJ Focus Profile Extended 51ch	1.103	Stage 1
204	Moving Head Spot	ADJ Focus Profile Extended 51ch	1.154	Stage 1
205	Moving Head Spot	ADJ Focus Profile Extended 51ch	3.001	Stage 2

206	Moving Head Spot	ADJ Focus Profile Extended 51ch	3.052	Stage 2
207	Moving Head Spot	ADJ Focus Profile Extended 51ch	3.103	Stage 3
208	Moving Head Spot	ADJ Focus Profile Extended 51ch	3.154	Stage 3
209	Moving Head Spot	ADJ Focus Profile Extended 51ch	5.201	House 1
210	Moving Head Spot	ADJ Focus Profile Extended 51ch	5.252	House 1

401	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	1.205	Stage 1
402	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	1.252	Stage 1
403	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	1.305	Stage 1
404	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	1.355	Stage 1
405	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	3.205	Stage 2
406	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	3.255	Stage 2
407	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	3.305	Stage 3
408	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	3.355	Stage 3
409	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	5.001	House 1
410	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	5.051	House 1
411	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	5.101	House 1
412	Moving Head Led Wash	ADJ Focus Flex Extended 50ch	5.151	House 1

61	Frontlight	ETC Sourcefour LED Lustr+ Direct+Strobe on + fan. 10ch	2.340	House 1
62	Frontlight	ETC Sourcefour LED Lustr+ Direct+Strobe on + fan. 10ch	2.350	House 1
63	Frontlight	ETC Sourcefour LED Lustr+ Direct+Strobe on + fan. 10ch	2.360	House 1
64	Frontlight	ETC Sourcefour LED Lustr+ Direct+Strobe on + fan. 10ch	2.370	House 1
508	LED Wall	Generic RGB 8-Bit	4.430	
509	LED Wall	Generic RGB 8-Bit	4.433	
510	LED Wall	Generic RGB 8-Bit	4.436	
511	LED Wall	Generic RGB 8-Bit	4.439	

512	LED Wall	Generic RGB 8-Bit	4.442	
513	LED Wall	Generic RGB 8-Bit	4.445	
514	LED Wall	Generic RGB 8-Bit	4.448	
515	LED Wall	Generic RGB 8-Bit	4.451	
516	LED Wall	Generic RGB 8-Bit	4.454	
517	LED Wall	Generic RGB 8-Bit	4.457	
518	LED Wall	Generic RGB 8-Bit	4.460	
519	LED Wall	Generic RGB 8-Bit	4.463	